

Specification For Approval



Item P/N	PIN6045WC-SERIES	Test Instrument	E4991 、 4338 、 6379
Product	Power Inductor	Test Frequency	100 KHz / 0.25V

Customer : _____

Customer P/N : _____

Description : _____ Power Inductor

HT P/N : _____ PIN6045WC-SERIES

Revision No. : _____ Version: 1.0

Date : _____

Notes : _____ Automobile Conform to AEC-Q200



HUNGTRON TECHNOLOGY CO., LTD.

NO.159, SEC. 1, GONG 2ND RD., LONGTAN DIST., TAOYUAN CITY 325, TAIWAN (R.O.C.)

TEL: +886-3-4898809 FAX: +886-3-4896068

www.hungtron.com.tw

IATF 16949:2016 / ISO 9001:2015 / ISO 14001:2015

Ht Documented		Customer Approval
Approved	Jack	
Checked	George	
Prepared	Cherrie	



HUNGTRON TECHNOLOGY Co., Ltd.

RoHS 2
2011/65/EU


[illegible]

Specification



Item P/N	PIN6045WC-SERIES	Test Instrument	E4991、4338、6379
Product	Power Inductor	Test Frequency	100 KHz / 0.25V

■ Style and Dimensions (mm)

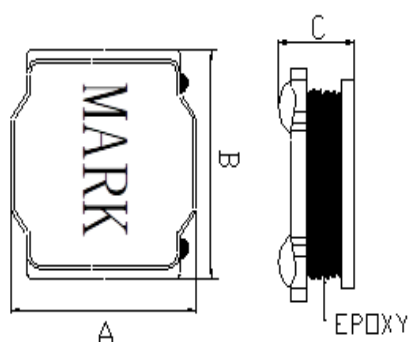

PIN6045	Dimensions
A	6.0 ± 0.2
B	6.0 ± 0.2
C	4.5 Max.
D	4.9 Ref.
E	1.65 Ref.
F	2.7 Ref.

■ Explanation Of Part Numbers

① ② ③ ④ ⑤
PIN 6045 WC - 1R0 M

- ① Product Name
- ② Shapes and Dimensions
- ③ Shielding Type for automotive Electronics based on AEC-Q200 except for Power train and Safety
- ④ Inductance 【at 100KHz】 1R0:1.0μH
- ⑤ Inductance Tolerance (N = 30% , M = 20% , K = 10%)

■ Electrical Characteristics

P/N	Inductance (μH)	DCR (Ω) Max.	DCR (Ω) Typ.	Isat(A) L/L0 ≤ 30%	Irms(A) L/L0 ≤ 40%	MARKING
PIN6045WC-1R0□	1.0	0.014	0.011	9.85	7.00	1R0
PIN6045WC-1R5□	1.5	0.016	0.013	9.00	6.00	1R5
PIN6045WC-1R8□	1.8	0.016	0.013	7.00	5.50	1R8
PIN6045WC-2R2□	2.2	0.023	0.018	6.90	5.40	2R2
PIN6045WC-3R3□	3.3	0.027	0.021	5.90	4.50	3R3
PIN6045WC-4R7□	4.7	0.035	0.030	5.30	4.20	4R7
PIN6045WC-5R6□	5.6	0.036	0.030	4.30	4.10	5R6
PIN6045WC-6R8□	6.8	0.040	0.034	4.20	4.00	6R8
PIN6045WC-8R2□	8.2	0.060	0.048	3.50	3.20	8R2
PIN6045WC-100□	10	0.066	0.055	3.30	3.10	100
PIN6045WC-120□	12	0.078	0.066	3.00	2.80	120
PIN6045WC-150□	15	0.088	0.080	2.70	2.60	150

Characteristics



Item P/N	PIN6045WC-SERIES	Test Instrument	E4991 、 4338 、 6379
Product	Power Inductor	Test Frequency	100 KHz / 0.25V

■ Electrical Characteristics

P/N	Inductance (μ H)	DCR (Ω) Max.	DCR (Ω) Typ.	Isat(A) L/L0 $\leq$ 30%	Irms(A) L/L0 $\leq$ 40%	MARKING
PIN6045WC-220□	22	0.138	0.115	2.20	2.10	220
PIN6045WC-270□	27	0.156	0.130	2.10	1.90	270
PIN6045WC-330□	33	0.182	0.160	1.70	1.50	330
PIN6045WC-470□	47	0.260	0.225	1.65	1.40	470
PIN6045WC-680□	68	0.380	0.340	1.40	1.10	680
PIN6045WC-101□	100	0.550	0.500	1.00	0.95	101
PIN6045WC-121□	120	0.605	0.550	0.95	0.90	121
PIN6045WC-151□	150	0.750	0.650	0.80	0.75	151
PIN6045WC-221□	220	1.040	0.860	0.75	0.70	221
PIN6045WC-331□	330	2.200	1.800	0.55	0.45	331
PIN6045WC-471□	470	2.650	2.150	0.50	0.40	471
PIN6045WC-681□	680	3.800	3.100	0.40	0.35	681
PIN6045WC-102□	1000	6.500	5.200	0.32	0.30	102

Note :

- L: Agilent/HP E4991, 100KHz/250mV
- RDC: Digital Milliohm Meter Agilent/HP4338B
- Isat & Irms : Microtest 6379, 100KHz/250mV
- Isat for Inductance drop 30% from its value without current typical.
- Irms for a 40℃ rise above 25℃ ambient typical.
- If Use wave soldering is there will be some risk. (Crack 、 unwitting& Mark Shedding)
- Re-flow soldering temperatures below 240 degrees, there will be unwitting risk.
- Operating Temperature Range -55℃ to +155℃ (Including self-temperature rise)
- Storage temp. and humidity: Less than 40℃ and 60% RH.
- When total area of exposed wire occurring to each side is not greater than 75% of coating resin area, that is acceptable.

Characteristics



Item P/N	PIN6045WC-SERIES	Test Instrument	E4991、4338、6379
Product	Power Inductor	Test Frequency	100 KHz / 0.25V

■ Reliability and Test Condition

Item	Performance	Test Condition
Operating Temperature	-55~+155℃ (Including self-temperature rise)	
Electrical Performance Test		
Inductance (μH)	Refer to standard electrical characteristic list	Agilent E4991, Agilent 4287 Agilent E4982A、Agilent 4286 MICROTEST 6379
Q		
SRF		Agilent E4991
DC Resistance		Agilent 4338
Rated Current	Base on temp. rise & $\Delta L/L_{0A} \leq 30\%$	Saturation DC Current (Isat) will cause L0A to drop approximately $\Delta L(\%)$
Temperature Rise Test	$\Delta T \leq 40^\circ\text{C}$ Max.	Heat Rated Current (Irms) Will cause the coil temperature rise approximately $\Delta T(^{\circ}\text{C})$ without core loss. 1. Applied the allowed DC current. 2. Temperature measured by digital surface thermometer
Mechanical Performance Test		
Resistance to Soldering Heat MIL-STD-202 Method 210	1. Inductors shall be no evidence of electrical and mechanical damage. 2. Inductance within $\pm 10\%$ of initial value	Temp: $260 \pm 5^\circ\text{C}$ Time: $10 \pm 1\text{Sec}$
Solderability Test ANSI/JSTD-002	More than 95% of terminal electrode should be covered with solder.	1. The test samples shall be dipped in flux, and then immersed in molten 2. Preheating: $155^\circ\text{C} \pm 5^\circ\text{C}$ 1 minute 3. Solder: Sn/Ag/Cu(99%、0.3%、0.7%) 4. Solder temperature: $245 \pm 5^\circ\text{C}$ 5. Duration: $3 \pm 0.5\text{ sec}$ 6. Immersion depth: all sides of mounting terminal shall be immersed

Characteristics



Item P/N	PIN6045WC-SERIES	Test Instrument	E4991 、 4338 、 6379
Product	Power Inductor	Test Frequency	100 KHz / 0.25V

■ Reliability and Test Condition

Item	Performance	Test Condition												
Reliability Test														
Humidity Test MIL-STD-202 ME THOD 103	1. Visual examination: No mechanical damage 2. Inductance: Within±10% of initial value	1. Temperature: 85±2℃ 2. Humidity: 90~95% 3. Time: 500±8hrs 4. Measured at Room Temperature After Placing for 2 to 3hrs												
Thermal Shock Test MIL-STD-202 ME THOD 107		Conditions for 1 cycle <table><tr><th>Step</th><th>Temperature(℃)</th><th>Times(min.)</th></tr><tr><td>1</td><td>-55±2</td><td>30±3</td></tr><tr><td>2</td><td>Room</td><td>Within5</td></tr><tr><td>3</td><td>+155±2</td><td>30±3</td></tr></table> Total: 1000 cycle Measured at Room Temperature After Placing for 2 to 3hrs	Step	Temperature(℃)	Times(min.)	1	-55±2	30±3	2	Room	Within5	3	+155±2	30±3
Step		Temperature(℃)	Times(min.)											
1		-55±2	30±3											
2	Room	Within5												
3	+155±2	30±3												
High Temperature Life Test MIL-STD-202 ME THOD 108	1. Temperature: 155±2℃ 2. Time: 500±8hrs 3. Measured at Room Temperature After Placing for 2 to 3hrs													
Low Temperature Storage Test JESD22-A119	1. Temperature: -55±2℃ 2. Time: 500±8hrs 3. Measured at Room Temperature After Placing for 2 to 3hrs													
Random Vibration Test MIL-STD-202 ME THOD 204	Appearance: Cracking, shipping, and any other defects harmful to the characteristics should not be allowed. Inductance: Within±10%	Frequency: 10Hz~2000Hz, 20 min/Cycles Amplitude: 1.52mm Directions and times: X, Y, Z directions for 15 min. This cycle shall be performed 12 times. In each of three mutually perpendicular directions (Total 9hrs).												

Characteristics



Item P/N	PIN6045WC-SERIES	Test Instrument	E4991 、 4338 、 6379
Product	Power Inductor	Test Frequency	100 KHz / 0.25V

■ Soldering and Mounting

Soldering

Mildly activated rosin fluxes are preferred. Terminations are suitable for re-flow soldering systems.

If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.



Solder re-flow:

Recommended temperature profiles for re-flow soldering in Figure 1.

Soldering Iron (Figure 2):

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. If the event that a soldering iron must be employed the following precautions are recommended.

- Preheat circuit and products to 150℃
- Never contact the ceramic with the iron tip
- Use a 20-watt soldering iron with tip diameter of 1.0mm
- 355℃ tip temperature (max.)
- 1.0mm tip diameter (max.)

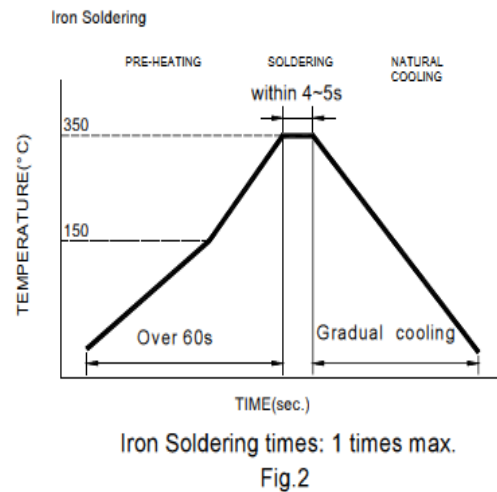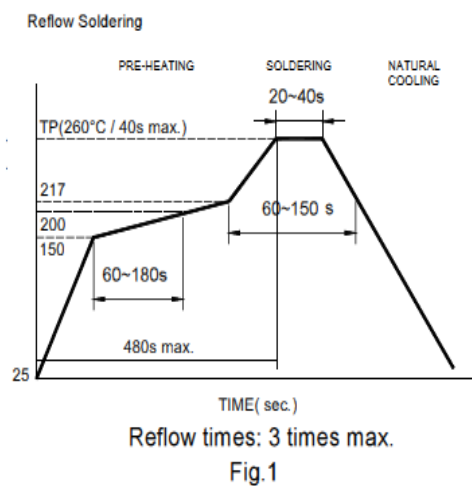

Characteristics



Item P/N	PIN6045WC-SERIES	Test Instrument	E4991 、 4338 、 6379
Product	Power Inductor	Test Frequency	100 KHz / 0.25V

■ Application Notice

●Storage Conditions(component level)

To maintain the solderability of terminal electrodes:

1. HUNGTRON products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
2. Temperature and humidity conditions: Less than 40℃ and 60% RH.
3. Recommended products should be used within 12 months form the time of delivery.
4. The packaging material should be kept where no chlorine or sulfur exists in the air.

●Transportation


1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

Packing For SMD




Item P/N	PIN6045WC-SERIES	Test Instrument	E4991、4338、6379
Product	Power Inductor	Test Frequency	100 KHz / 0.25V

■ Carrie Tape Dimensions(mm)

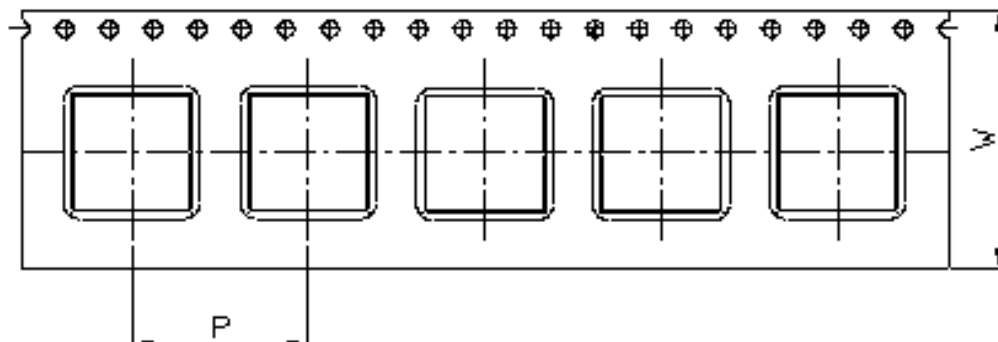

W	P
16	8

■ Taping Dimensions(mm)

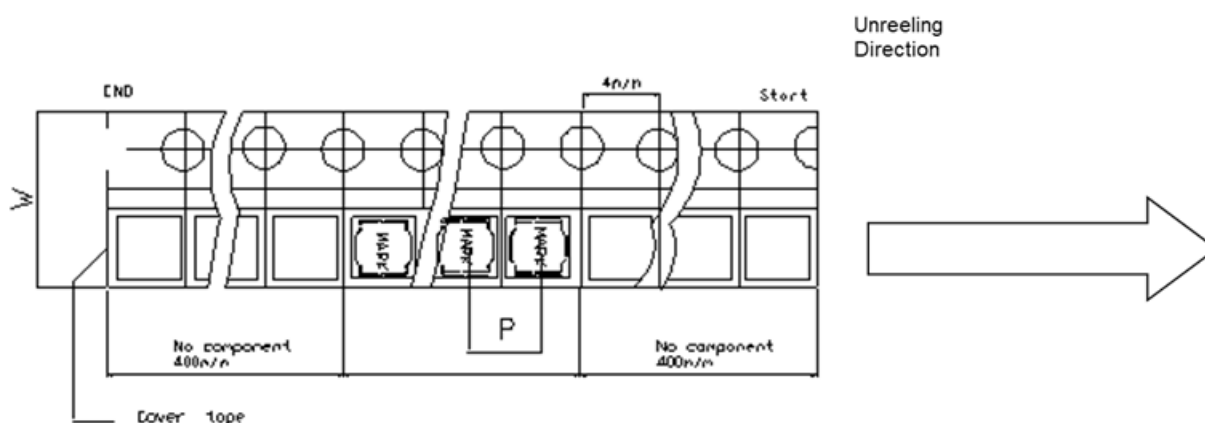

Note: After the product is braided, the outermost layer of the reel is 400mmMIN, and the innermost layer is 400mmMIN.

■ Packaging Quantity

Chip Size	6045
13"/ Reel	1500